# ZB4BK1443

# red illuminated selector switch head Ø22 2-position spring return





### Main

Range of product	Harmony XB4
Product or component	Head for illuminated selector switch
type	
Product compatibility	Integral LED
Device short name	ZB4
Bezel material	Chromium plated metal
Head type	Standard
Mounting diameter	22 mm
Sale per indivisible	1
quantity	
Shape of signaling unit head	Round
Type of operator	Right to left spring return
Operator profile	Red standard handle
Operator position information	2 positions 90°

## Complementary

Device presentation	Basic element			
	M6 for <2 contacts using single blocks in front mounting with integral LED and transformer M10 for <2 contacts using single blocks in front mounting with integral LED M4 for <4 contacts using single and double blocks in front mounting with integral LED			
Electrical composition code	M3 for <4 contacts using single blocks in front mounting with integral LED			
Mechanical durability	500000 cycles			
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m			
Net weight	0.037 kg			
CAD overall depth	43 mm			
CAD overall height	29 mm			
CAD overall width	29 mm			

#### Environment

Protective treatment	TH			
Ambient air temperature for storage	-4070 °C			
Ambient air temperature for operation	-4070 °C			
Overvoltage category	Class I conforming to IEC 60536			
IP degree of protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K			
NEMA degree of protection	NEMA 13 NEMA 4X			
IK degree of protection	IK06 conforming to IEC 50102			
Standards	JIS C8201-5-1 EN/IEC 60947-1 EN/IEC 60947-5-1 CSA C22.2 No 14 EN/IEC 60947-5-5 EN/IEC 60947-5-5 UL 508 JIS C8201-1			

Product certifications	RINA UL listed CSA LROS (Lloyds register of shipping) GL BV DNV
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

# Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Weight	43 g	
Package 1 Height	3.3 cm	
Package 1 width	4.8 cm	
Package 1 Length	5.2 cm	
Unit Type of Package 2	BB1	
Number of Units in Package 2	5	
Package 2 Weight	215 g	
Package 2 Height	4.8 cm	
Package 2 width	26.5 cm	
Package 2 Length	3.3 cm	
Unit Type of Package 3	S03	
Number of Units in Package 3	250	
Package 3 Weight	11.326 kg	
Package 3 Height	30 cm	
Package 3 width	30 cm	
Package 3 Length	40 cm	

# Offer Sustainability

Sustainable offer status	Green Premium product			
REACh Regulation	REACh Declaration			
REACh free of SVHC	Yes			
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EPEU RoHS  Declaration			
Toxic heavy metal free	Yes			
Mercury free	Yes			
RoHS exemption information	₫Yes			
China RoHS Regulation	☐ China RoHS Declaration			
Environmental Disclosure	Product Environmental Profile			
Circularity Profile	End Of Life Information			


## Contractual warranty

147	40	
Warranty	18 months	
· · · · · · · · · · · · · · · · · · ·	To months	

# Product data sheet Dimensions Drawings

# ZB4BK1443


## **Dimensions**





# ZB4BK1443


### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

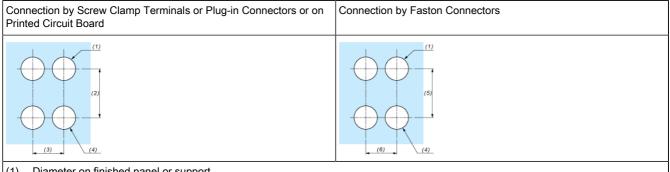

- Diameter on finished panel or support
- 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0$  <sup>+0.4</sup> / 0.88 in.  $_0$  <sup>+0.016</sup>) (4)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


## Panel Cut-outs (Viewed from Installer's Side)

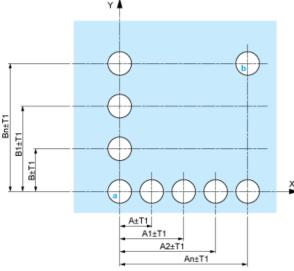


- 30 mm min. / 1.18 in. min.
- B: 40 mm min. / 1.57 in. min.


### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

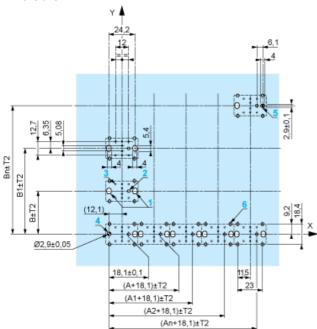

A: 30 mm min. B: 40 mm min. Dimensions in in.



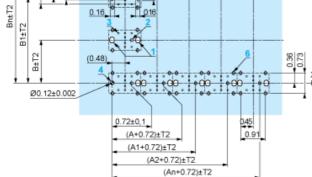

A: 1.18 in. min. B: 1.57 in. min.

#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.


### Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2 30' (excluding cut-outs marked a and b).

0.16

- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - o every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.




- (1) Panel
- (2) Printed circuit board

## Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm  $\pm$  0.05 / 0.11 in.  $\pm$  0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.


Electrical Composition Corresponding to Code M3



Electrical Composition Corresponding to Code M4



Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



Legend

Single contact





Light block



Possible location



Sequence of Contacts Fitted to 2-position Selector Switch Body

## Position 315°



Push	Position	Тор			
				$\otimes$	
Bottom	Δ	Δ			
Location		Left	Right		
State		0	0		
Contacts	N/O		open	open	
N/C		closed	closed		-

## Position 45°



Push	Position	Тор		$\otimes$	
Bottom					
Location		Left	Right		
State		1	1		
Contacts N/O			closed	closed	
N/C		open	open		